

color_x ba10

The BA10 model is a single-column towel warmer created with 10 mm diam. carbon steel elements.

ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

- C0 Category without any additional charge (RAL 9010)
- C1 Category +10%
- C2 Category +15%
- C3 Category +20%
- RAL colours not included in the colour chart +30%
- Colours according to samples request feasibility and cost estimate

PLATED finishes

- G0 Category without any additional charge (Glossy Chrome)
- G1 Category without any additional charge (Satin-finish Nickel)
- G5 Category +50% (14kt Gold)
- G6 Category +60% (24kt Gold)

SUPPORTS

The towel warmers are supplied with standard supports (code ST) that include wall fixing shelves with anchors and wall fixing kit. On request they can be ordered with bracket supports that are permanently welded on the towel warmers and therefore must be specified when placing the order, their code and cost are as follows:

- Right side WALL bracket supports (code MD) €
- Left side WALL bracket supports (code MS) €
- CEILING bracket supports (code SO) €




The Chrome plated version cannot be supplied with bracket supports

LIMITS

- WALL bracket supports 60,0 cm max. width
- CEILING bracket supports 60,0 cm max. width

PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.

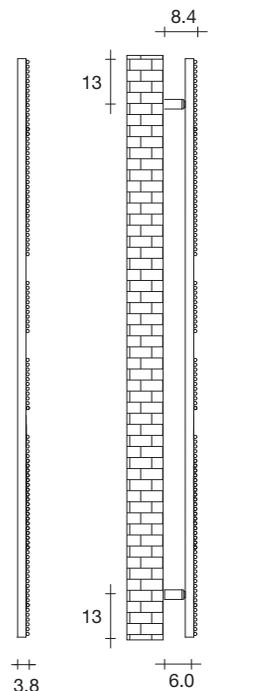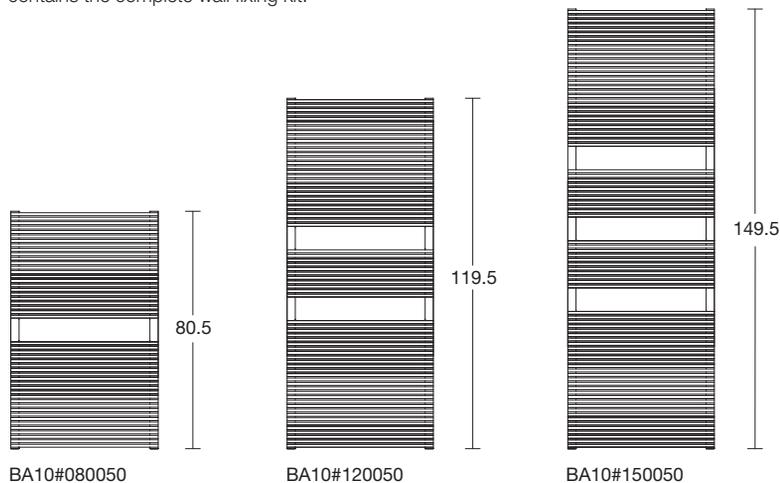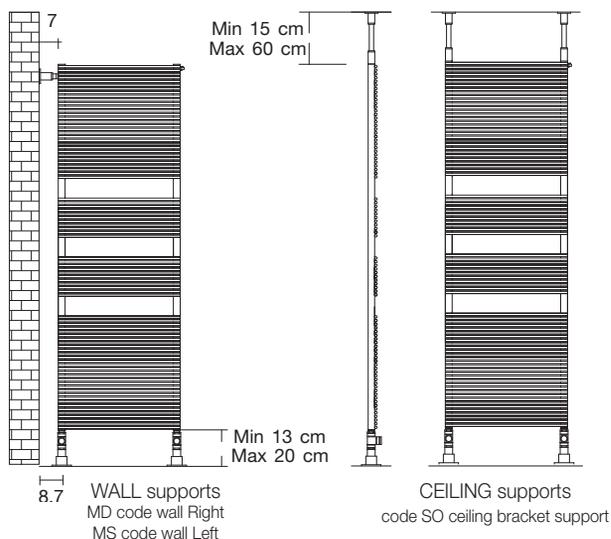


CONNECTORS

The CO10 models are always supplied with "OB1" 1/2" diameter connectors

Should different connectors be required, such connections must be strictly specified in the order. IMPORTANT: the connectors of towel warmers and radiators connected to the same system should all be the same, because different connectors could cause operating problems.


Standard connectors

standard connector always supplied, if not otherwise specified in the order




Custom-made connectors

Connectors available on request WITH additional charge of € (NOT available in chrome-plated version)

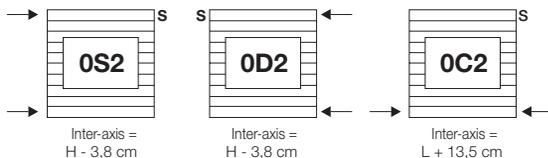


Custom-made connectors

Connectors available on request WITH additional charge of €

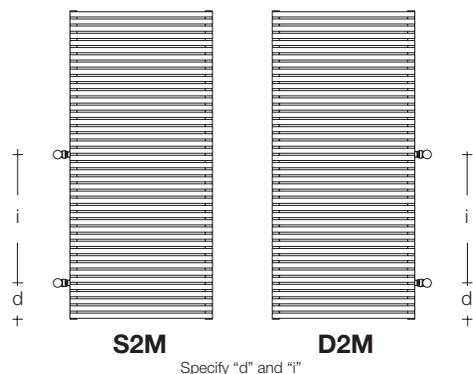

Connectors on request

Connectors available on request WITHOUT any additional charge

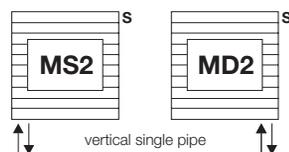

→ = Position of connectors S = Air Vent I

To help you properly fill out the code relative to the item requested see code examples on page 5

HYDRAULIC VERSION

| Code | H (cm) | L (cm) | Inter-axis (cm) | Watts ΔT 50°C Coloured version | Watts ΔT 50°C Chrome plated version | Category C0 RAL 9010 (€) | Category C1 (€) | Category C3 (€) | Chrome plated G0 (€) | Water Content (l) |
|-------------|-----------|-----------|-----------------|--------------------------------------|---|-----------------------------|--------------------|--------------------|----------------------------|----------------------|
| BA10#080040 | 80,5 | 40 | 36,6 | 392 | 288 | | | | | 1,507 |
| BA10#080050 | | 50 | 46,6 | 506 | 371 | | | | | 1,884 |
| BA10#080060 | | 60 | 56,6 | 623 | 475 | | | | | 2,261 |
| BA10#120040 | 119,5 | 40 | 36,6 | 588 | 430 | | | | | 2,166 |
| BA10#120050 | | 50 | 46,6 | 755 | 533 | | | | | 2,708 |
| BA10#120060 | | 60 | 56,6 | 925 | 636 | | | | | 3,249 |
| BA10#150040 | 149,5 | 40 | 36,6 | 731 | 535 | | | | | 2,638 |
| BA10#150050 | | 50 | 46,6 | 902 | 661 | | | | | 3,298 |
| BA10#150060 | | 60 | 56,6 | 1076 | 777 | | | | | 3,957 |
| BA10#180040 | 181,0 | 40 | 36,6 | 881 | 664 | | | | | 3,297 |
| BA10#180050 | | 50 | 46,6 | 1097 | 804 | | | | | 4,121 |
| BA10#180060 | | 60 | 56,6 | 1318 | 970 | | | | | 4,946 |

For correction factors different to ΔT 50°C see page 206

Towel warmers available in stock with OB1 connector and in White RAL 9010 colour

color_x ba10 electric and dual version

ELECTRIC VERSION

The standard electric version is supplied with a Class 2 resistor installed on the right side of the towel warmer. The resistor is equipped with safety thermal cut-out and preset temperature control.

MIXED VERSION (ELECTRIC/WATER)

The mixed version is created with the application of a specific conversion kit that enables the towel warmer to operate both with the heating system's hot water and electrically.

For both versions some variants for room temperature control are available as accessories, specifically:

- Resistor with room thermostat installed in the resistor as shown in the diagram in page i 107.
- Room temperature control with DIGITAL wireless THERMOSTAT programmable with 4 different programs
- Room temperature control with wireless WALL THERMOSTAT featuring temperature adjustment and on/off button.

ADDITIONAL COLOUR AND FINISH CHARGE (see new colour chart)

The additional charges are calculated on the base price of RAL 9010 for the coloured versions and on the base price of Glossy Chrome for the plated finishes.

| | |
|--|--|
| C0 Category | without any additional charge (RAL 9010) |
| C1 Category | +10% |
| C2 Category | +15% |
| C3 Category | +20% |
| RAL colours not included in the colour chart | +30% |
| Colours according to samples | request feasibility and cost estimate |

PLATED finishes


| | |
|-------------|---|
| G0 Category | without any additional charge (Glossy Chrome) |
| G1 Category | without any additional charge (Satin-finish Nickel) |
| G5 Category | +50% (14kt Gold) |
| G6 Category | +60% (24kt Gold) |

SUPPORTS


The towel warmers are supplied with standard supports (code ST) that include wall fixing shelves. The bracket supports are NOT possible with the electric version nor with plated finish.

PACKING

The cardboard packing box is included in the price of sale of the products, and it contains the complete wall fixing kit.


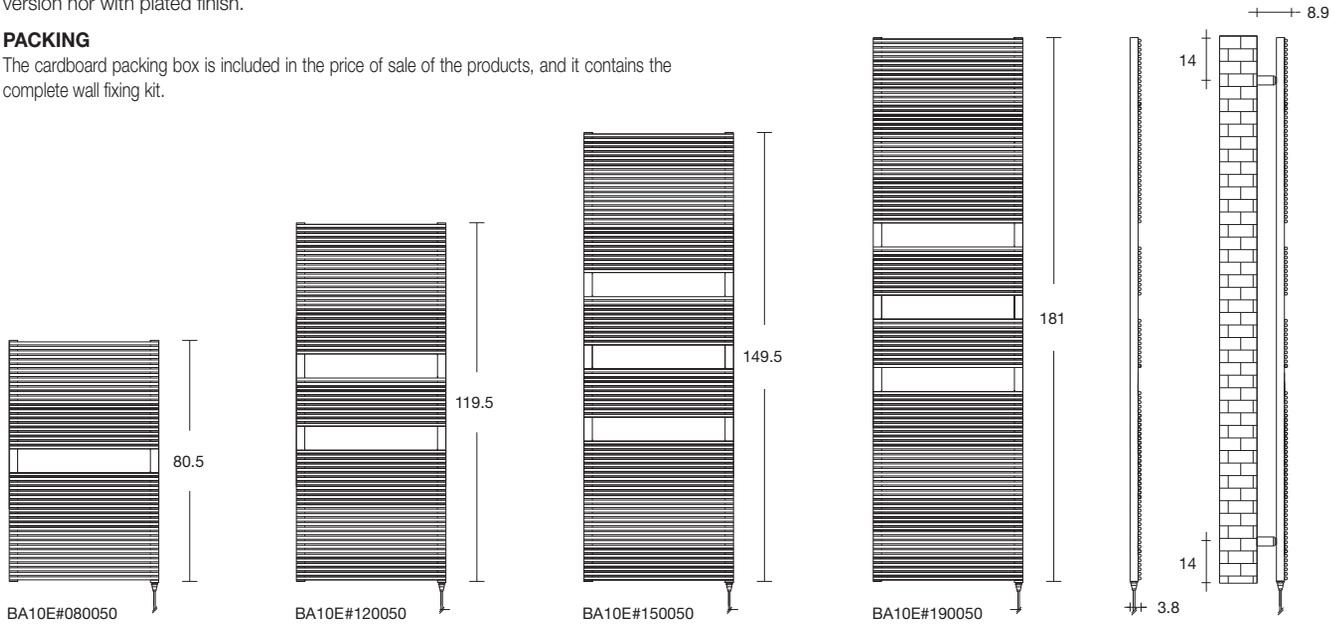


WIRELESS THERMOSTAT CONNECTION DIAGRAM

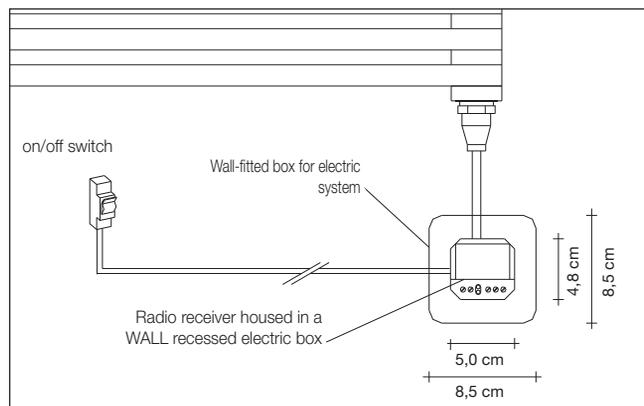

WIRELESS THERMOSTATS

Both these control and temperature customizing solutions require the installation of a radio receiver housed in a specific electrical box, which is to be recessed in the wall.

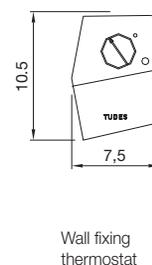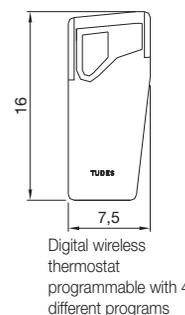

To help you properly fill out the code relative to the item requested see code examples on page 5

ELECTRIC VERSION

| Code | H* (cm) | L (cm) | Electric resistor | Resistor type | Category C0 RAL 9010 (€) | Category C1 (€) | Category C3 (€) | Chrome plated G0 (€) |
|--------------|------------|-----------|-------------------|---------------|-----------------------------|--------------------|--------------------|-------------------------|
| BA10E#080040 | 80,5 | 40,0 | 300 | Class 2 | | | | |
| BA10E#080050 | | 50,0 | 300 | Class 2 | | | | |
| BA10E#080060 | | 60,0 | 600 | Class 2 | | | | |
| BA10E#120040 | 119,5 | 40,0 | 300 | Class 2 | | | | |
| BA10E#120050 | | 50,0 | 600 | Class 2 | | | | |
| BA10E#120060 | | 60,0 | 900 | Class 2 | | | | |
| BA10E#150040 | 149,5 | 40,0 | 600 | Class 2 | | | | |
| BA10E#150050 | | 50,0 | 900 | Class 2 | | | | |
| BA10E#150060 | | 60,0 | 900 | Class 2 | | | | |
| BA10E#180040 | 181,0 | 40,0 | 900 | Class 2 | | | | |
| BA10E#180050 | | 50,0 | 900 | Class 2 | | | | |
| BA10E#180060 | | 60,0 | 1200 | Class 2 | | | | |

* The height indicated DOES NOT include the space taken up by the electrical resistor that protrudes 5cm downwards.

DUAL VERSION

| Code | H* (cm) | L (cm) | Electric resistor | Resistor type | Category C0 RAL 9010 (€) | Category C1 (€) | Category C3 (€) | Chrome plated G0 (€) |
|--------------|------------|-----------|-------------------|---------------|-----------------------------|--------------------|--------------------|-------------------------|
| BA10M#080040 | 80,5 | 40,0 | 300 | Class 2 | | | | |
| BA10M#080050 | | 50,0 | 300 | Class 2 | | | | |
| BA10M#080060 | | 60,0 | 600 | Class 2 | | | | |
| BA10M#120040 | 119,5 | 40,0 | 600 | Class 2 | | | | |
| BA10M#120050 | | 50,0 | 600 | Class 2 | | | | |
| BA10M#120060 | | 60,0 | 900 | Class 2 | | | | |
| BA10M#150040 | 149,5 | 40,0 | 600 | Class 2 | | | | |
| BA10M#150050 | | 50,0 | 900 | Class 2 | | | | |
| BA10M#150060 | | 60,0 | 900 | Class 2 | | | | |
| BA10M#180040 | 181,0 | 40,0 | 900 | Class 2 | | | | |
| BA10M#180050 | | 50,0 | 900 | Class 2 | | | | |
| BA10M#180060 | | 60,0 | 1200 | Class 2 | | | | |


* The height DOES NOT include the space taken up by the KIT for the MIXED version that protrudes 11,5 cm downwards.
Mixed version inter-axis: L-10,6 cm. The inter-axis in the MIXED version is not centred in respect to the towel warmer (see diagram)

ACCESSORIES (for electric and mixed version)


| Code | Description | Finishes | Price (€) |
|---------|---|----------|-----------|
| ZRF001 | Wall-fitted booster function radio frequency emitter box (EMG TH IMH)-MCT8595 | | |
| ZRF002 | Weekly programming unit via radio frequency (table version) | | |
| ZRF003 | Radiofrequency receiver for wall box (REA 1CIMH A) - MCT8600 | | |
| ZRES#S9 | WHITE room thermostat for Class 2 resistors | white | |
| ZRES#S8 | GREY room thermostat for Class 2 resistors | grey | |

ELECTRIC VERSION DIAGRAM

CLASS 2 RESISTOR always supplied on electric version

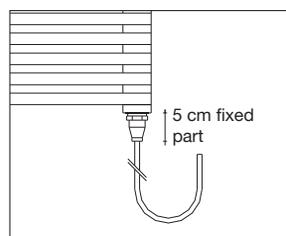


ROOM THERMOSTAT with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

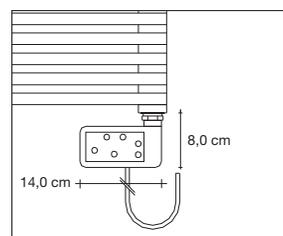

MIXED VERSION DIAGRAM

Kit for Class 2 ELECTRIC RESISTOR, always supplied in MIXED version

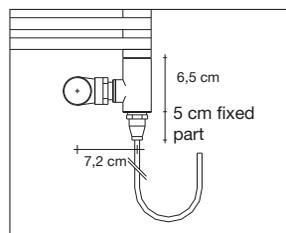

Kit for ROOM THERMOSTAT kit with Class 2 electric resistor (code ZRES#S8 or S9) supplied with an additional charge in price

